



NDS3536S

Encoder Modulator



OSD (Logo/Caption/QR Code) Insertion




Product Overview

NDS3536S is a professional high integration device which includes encoding, multiplexing, and modulation. It supports 8/16/24 HDMI inputs, 1 ASI input, 1 USB payer input and 128 IP inputs via the GE port. It also supports DVB-C RF out with 12 non-adjacent carries or DVB-T/ATSC RF out with 8 non-adjacent carriers, or ISDB-T RF out with 6/16 non-adjacent carriers, and supports 12/8/6/16 MPTS as mirror of 12/8/6/16 carriers through the GE port and 1 ASI out as mirror of one of the carriers. This full function device makes it ideal for small CATV head end system, and it's a smart choice for hotel TV system, entertainment system in sports bar, hospital, apartment...

Key features

- 8/16/24 HDMI inputs, MPEG-4 AVC/H.264 Video encoding
- 1 ASI input for re-mux
- 1 USB Player (Insert the USB Flash drive with “xxx.ts” videos in NDS3536S and play back the content in an easy way; file system FAT 32.)
- 128 IP input over UDP and RTP via GE port
- Each carrier out channel process maximum 32 IP from the GE port(UDP&RTP protocol)
- MPEG1 Layer II, LC-AAC and HE-AAC Audio encoding, AC3 Pass Through and audio gain adjustment
- Support 12 groups multiplexing/DVB-C modulating
- Support 8 groups multiplexing/DVB-T/ATSC modulating---Optional
- Support 6 (or 16) groups multiplexing/ISDB-T modulating---Optional
- Support 1 ASI out as mirror of one of RF output carriers---Optional
- Support 12 MPTS IP output over UDP, RTP/RTSP –DVB-C RF out
- Support 8 MPTS IP output over UDP, RTP/RTSP-- DVB-T/ATSC RF out
- Support 6 (or 16) MPTS IP output over UDP, RTP/RTSP-- ISDB-T RF out
- Support LOGO, Caption and QR code insertion(Language Supported: 中文, English, العربية, ไทย, हिन्दी, русский, اردو, for more languages please consult us...)
- Support PID remapping/ accurate PCR adjusting/PSI/SI editing and inserting
- Control via web management, and easy updates via web

Principle Chart

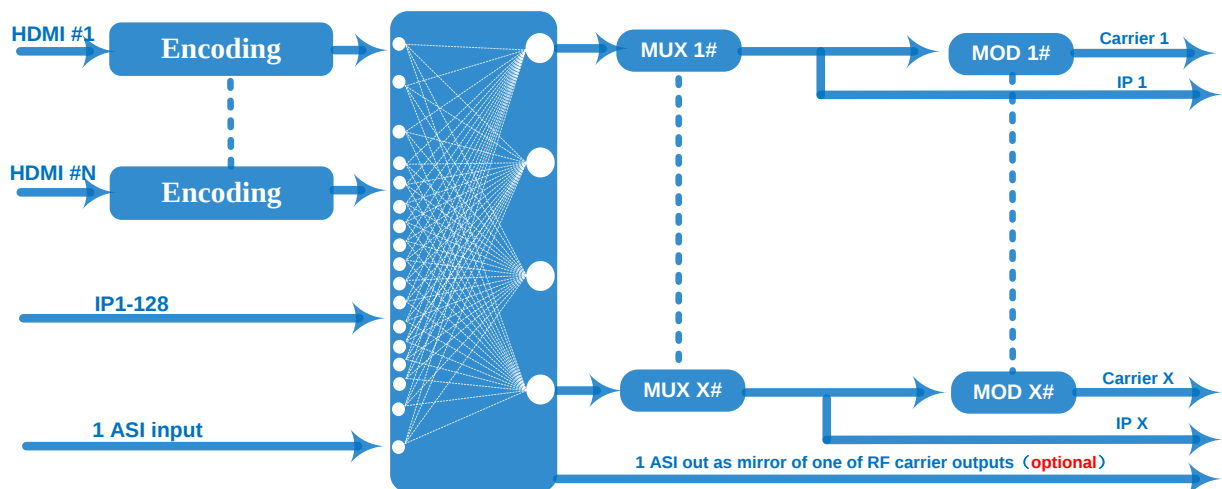

Technical Specifications

Input	8/16/24 HDMI inputs for option		
	1 ASI in for re-mux		
	1 USB Player input for re-mux		
	128 IP input over UDP and RTP, GE port, RJ45—DVB-C RF out		
	128 IP input over UDP and RTP, GE port, RJ45—DVB-T/ATSC RF out		
Video	Resolution	Input	1920×1080_60P, 1920×1080_60i, 1920×1080_50P, 1920×1080_50i, 1280×720_60P, 1280×720_50P, 720×576_50i, 720×480_60i,
		Output	1920×1080_30P, 1920×1080_25P, 1280×720_30P, 1280×720_25P, 720×576_25P, 720×480_30P,
	Encoding	MPEG-4 AVC/H.264	
	Bit-rate	1Mbps~13Mbps each channel	
	Rate Control	CBR/VBR	
	GOP Structure	IP...P (P Frame adjustment, without B Frame)	
	Encoding	MPEG-1 Layer 2, LC-AAC, HE-AAC and AC3 Pass through	
	Sampling rate	48KHz	
	Resolution	24-bit	
	Audio Gain	0-255 Adjustable	
Audio	MPEG-1 Layer 2 Bit-rate	48/56/64/80/96/112/128/160/192/224/256/320/384 kbps	
	LC-AAC Bit-rate	48/56/64/80/96/112/128/160/192/224/256/320/384 kbps	
	HE-AAC Bit-rate	48/56/64/80/96/112/128 kbps	
	Maximum PID Remapping	255 input per channel	
Multiplexing	Function	PID remapping (automatically or manually)	
		Accurate PCR adjusting	
		Generate PSI/ SI table automatically	
Modulation	DVB-C	QAM Channel	12 non-adjacent carriers output (maximum bandwidth 192MHz)
		Standard	EN300 429/ITU-T J.83A/B
		MER	≥40db
		RF frequency	50~960MHz, 1KHz step
		RF output level	-20~+3dbm, 0.1db step
		Symbol Rate	5.0Msps~7.0Msps, 1ksps stepping
			J.83A J.83B
		Constellation	16/32/64/128/256QAM 64/256 QAM
		Bandwidth	8M 6M
	DVB-T	Standard	EN300744
		FFT mode	2K, 4K, 8K

		Bandwidth	6M, 7M, 8M
		Constellation	QPSK, 16QAM, 64QAM
		Guard Interval	1/4, 1/8, 1/16, 1/32
		FEC	1/2, 2/3, 3/4, 5/6, 7/8
		MER	≥42 dB
		RF frequency	50~960MHz, 1KHz step
		RF out	8 non-adjacent carriers output (maximum bandwidth 192MHz)
		RF output level	-20~ +3dBm, 0.1db step
	ATSC	Standard	ATSC A/53
		Bandwidth	6M
		Constellation	8VSB
		FEC	RS(208 188)+Trellis
		MER	≥40dB
		ACL	-55 dBc
		RF frequency	50~960MHz, 1KHz step
		RF out	8 non-adjacent carriers output (maximum bandwidth 192MHz)
	RF output level	-20~+3dbm (for all carriers), 0.5db stepping	
	ISDB-T	Standard	ARIB STD-B31
		Bandwidth	6M
		Constellation	QPSK, 16QAM, 64QAM
		Guard Interval	1/32, 1/16, 1/8, 1/4
		Transmission Mode	2K, 4K, 8K
		Code rate	1/2, 2/3, 3/4, 5/6, 7/8
		MER	≥40dB
		RF frequency	50~960MHz, 1KHz step
		RF out	6 (or 16) non-adjacent carriers output (maximum bandwidth 192MHz)
		RF output level	-20dBm~+3dBm, 0.1dB stepping
	Stream output	1 ASI output as mirror of one of RF output carriers(Optional)	
		12 MPTS output over UDP and RTP/RTSP as mirror of 12 DVB-C carriers,	
8 MPTS output over UDP and RTP/RTSP as mirror of 8 DVB-T/ATSC carriers(Optional)			
6 MPTS output over UDP and RTP/RTSP as mirror of 6 ISDB-T carriers(Optional)			
16 MPTS output over UDP and RTP/RTSP as mirror of 16 ISDB-T carriers(Optional)			
1*1000M Base-T Ethernet interface, GE port			
System function	Network management (WEB)		
	Chinese and English language		
	Ethernet software upgrade		
Miscellaneous	Dimension (W×L×H)	482mm×328mm×44mm	
	Environment	0~45℃(work); -20~80℃（Storage）	
	Power requirements	AC 110V± 10%, 50/60Hz, AC 220 ± 10%, 50/60Hz	

Ordering Information

		IP input	IP output	RF carriers	Scrambling
DVB-C out		128	12	12	N/A
DVB-T out		128	8	8	N/A
ATSC out		128	8	8	N/A
ISDB-T out	V1	128	6	6	N/A
	V2	128	16	16	N/A